



TECHNICAL SPECIFICATION


Model:	PF-20
External Dimension (WxDxH):	670 x 895 x 1970 mm.
Internal Dimension (WxDxH):	-
Capacity:	320 Liters
System Temperature:	-30 to -40 Degree Celsius
Ambient Condition:	Not exceed 35 Degree Celsius
External Material:	Powder coated galvanized steel
Internal Material:	Stainless Steel
Door Material:	Powder coated galvanized steel
Door Frame Material:	Powder coated galvanized steel
Insulation:	Hard Polyurethane, 75 mm thickness
Compressor:	1.50 HP x 2 Sets
Shelves:	20 Shelves Aluminum (sliding)
Refrigerant:	R-404a/507/R-290
Cooling System:	Copper Line
Electric:	220-240 v/ 50 Hz/ 1 Ph
Power Consumption:	1,474 Watts (Max), 1,030 Watts (Nominal)
Maximum Starting Current:	28 Amp
Control System:	Dixell Digital Control
Lighting:	-
Legs:	Powder coated galvanized steel
Net Weight:	245 Kg.
20' Container Loadability:	18 Units
40' Container Loadability:	36 Units

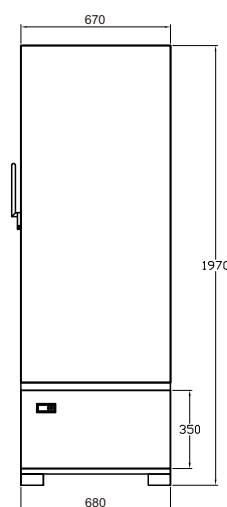

Front View

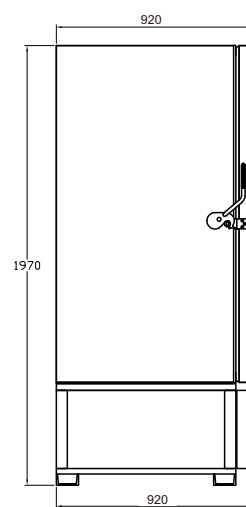

Side View

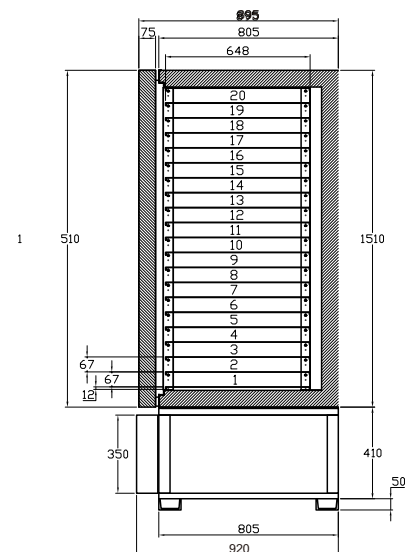

Section Side View

** Specifications subject to change without notice



PK INTERTRADE AND SUPPLY CO., LTD.

89/1070 M5, Pracha-Uthit Road, Bangmaenang, Bangyai, Nonthaburi 11140, Thailand

Tel. 662-0202015/081-6262 754 / www.pkintertrade.com / info@pkintertrade.com